


XBA-BYR7 Option Switch Settings

Supported bill Br 500, 1000, 5000, 10000, 20000, 50000, 100000 7bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject Br 500	ON							
★ Accept Br 500	OFF							
★ Reject Br 1000		ON						
★ Accept Br 1000		OFF						
★ Reject Br 5000			ON					
★ Accept Br 5000			OFF					
★ Reject Br 10000 & 20000				ON				
★ Accept Br 10000 & 20000				OFF				
★ Reject Br 50000 & 100000					ON			
★ Accept Br 50000 & 100000					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ ENABLE IrDA Download								ON
★ Reserved								OFF


This dip switch is located at the side of XBA.

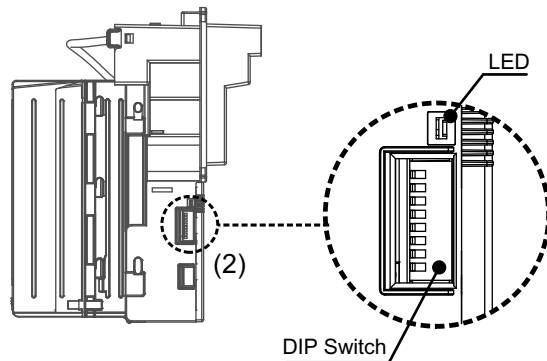

XBA-BYR7 (Pulse/MDB/ICT)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Inhibit Active HIGH	ON							
Inhibit Active LOW	OFF							
★ ENABLE INHIBIT-Sleep only		ON						
★ 5 second Timeout only		OFF						
★ Normal (Note.2)			OFF	OFF				
★ Mode 1 (Note.3)			OFF	ON				
★ Mode 2 (Note.4)			ON	OFF				
★ Mode 1 + 2 (Note.5)			ON	ON				
★ Credit-Pulse Normal HIGH					ON			
★ Credit-Pulse Normal LOW					OFF			
★ Pulse Mode						ON		
★ Other Mode						OFF		
Pulse Mode	Other Mode							
★ 1 pulse / Br 500	MDB Mode						OFF	OFF
★ 5 pulse / Br 500	ICT002U Mode						OFF	ON
★ 10 pulse / Br 500	ICT104U Mode						ON	OFF
★ 25 pulse / Br 500	ICT104V Mode						ON	ON

This dip switch is located on the CPU board, remove the CPU board cover first.

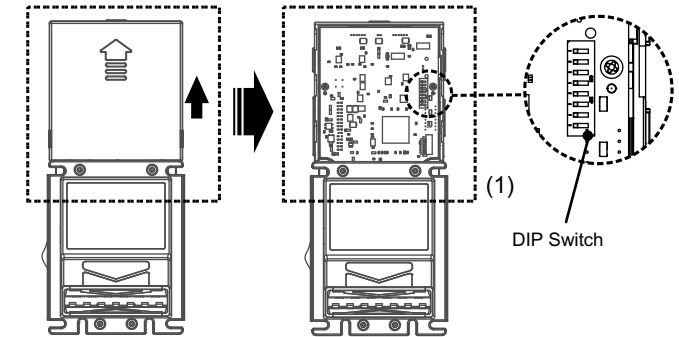

★ Manufacture setting

- Note :
1. After setting dip switch of the credit pulses, you should reset the bill acceptor again.
 2. Normal : No sleep function.
 3. Mode 1 : Bill-acceptor wakes up VMC with banknote only (special cable required).
 4. Mode 2 : VMC wakes up bill-acceptor.
 5. Mode 1+2 : Bill-acceptor wakes up with banknote or by VMC.
 6. Bv1=Br 500, Bv2=Br 1000, Bv3=Br 5000, Bv4=Br 10000, Bv5=Br 20000, Bv6=50000, Bv7=Br 100000.