


# XBA-EUR4 Option Switch Settings

Supported bill € 5, 10, 20, 50 4bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject € 5	ON							
★ Accept € 5	OFF							
★ Reject € 10		ON						
★ Accept € 10		OFF						
★ Reject € 20			ON					
★ Accept € 20			OFF					
★ Reject € 50				ON				
★ Accept € 50				OFF				
★ Reserved					ON			
★ Reserved					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ ENABLE IrDA Download								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

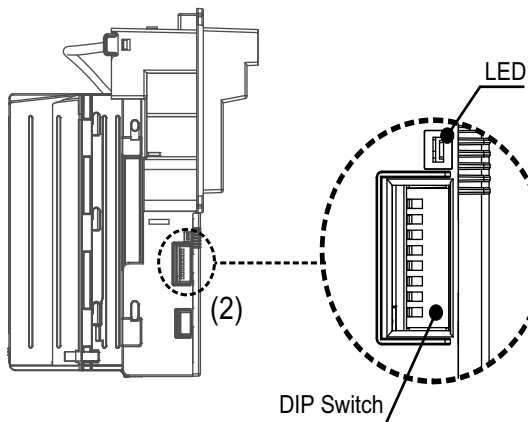

## Currency Assign Data


Interface	ICT104U	JPSTD	ccTalk	Pulse	RS232 A0
Bill value					
BV1	€ 5	€ 5	€ 5	€ 5	€ 5
BV2	€ 10		€ 10	€ 10	€ 10
BV3	€ 20		€ 20	€ 20	€ 20
BV4	€ 50		€ 50	€ 50	€ 50

ESCROW DATA		CURRENCY ASSIGN DATA			
Code	Denomination	Code	Country	Denomination	EXP
61h	Reserved	61h	E0	00h	00h
62h	€ 5	62h	E0	05h	00h
63h	€ 10	63h	E0	01h	01h
64h	€ 20	64h	E0	02h	01h
65h	€ 50	65h	E0	05h	01h

# XBA-EUR4 (Pulse/JPSTD/ccTalk/ICT/RS232 A0)

FUNCTION		SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
<b>Pulse Mode</b>	<b>Other Mode</b>								
★ Inhibit Active HIGH	ccTalk CRC 16-bit checksum	ON							
Inhibit Active LOW	ccTalk 8-bit checksum & Restoe Mode.(Note.6)	OFF							
★ ENABLE INHIBIT-Sleep only			ON						
5 second Timeout only			OFF						
Normal (Note.2)				ON					
Mode 1 (Note.3)				OFF					
Mode 2 (Note.4)					ON				
★ Mode 1 + 2 (Note.5)					OFF				
★ Credit-Pulse Normal HIGH	ccTalk 16-bit Encryption mode & Restoe Mode.(Note.6)					ON			
Credit-Pulse Normal LOW	ccTalk 16-bit Decrypt mode & 8-bit checksum					OFF			
★ Pulse Mode							ON		
Other Mode							OFF		
★ 1 pulse / € 5	ccTalk Mode							OFF	OFF
5 pulse / € 5	RS232 A0 Mode							OFF	ON
10 pulse / € 5	ICT104U Mode							ON	OFF
25 pulse / € 5	JPSTD Mode							ON	ON

This dip switch is located on the CPU board, remove the CPU board cover first.

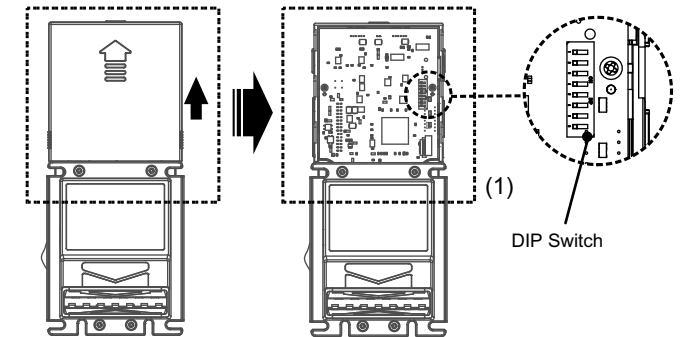

### ★ Manufacture setting

- Note :
1. After setting dip switch of the credit pulses, you should reset the bill acceptor again.
  2. Normal : No sleep function.
  3. Mode 1 : Bill-acceptor wakes up VMC with banknote only (special cable required).
  4. Mode 2 : VMC wakes up bill-acceptor.
  5. Mode 1+2 : Bill-acceptor wakes up with banknote or by VMC.
  6. Restore ccTalk address to its default value of 40 and the encryption key to its default value of 123456.