


XBA-TRY6 Option Switch Settings

Supported bill Lira 5, 10, 20, 50, 100, 200 6bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Reject Lira 5	ON							
★ Accept Lira 5	OFF							
Reject Lira 10		ON						
★ Accept Lira 10		OFF						
Reject Lira 20			ON					
★ Accept Lira 20			OFF					
Reject Lira 50				ON				
★ Accept Lira 50				OFF				
Reject Lira 100 & 200					ON			
★ Accept Lira 100 & 200					OFF			
Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
ENABLE IrDA Download								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

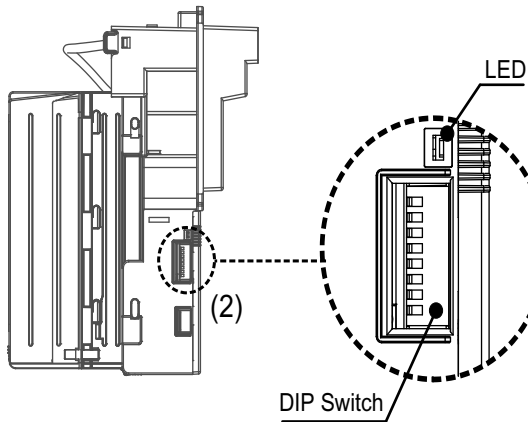

Currency Assign Data


Interface Bill value	Pulse	JPSTD	ccTalk	ICT104U	RS232 A0
BV1	Lira 5	Lira 5	Lira 5	Lira 5	Lira 5
BV2	Lira 10		Lira 10	Lira 10	Lira 10
BV3	Lira 20		Lira 20	Lira 20	Lira 20
BV4	Lira 50		Lira 50	Lira 50	Lira 50
BV5	Lira 100		Lira 100	Lira 100	Lira 100
BV6	Lira 200		Lira 200	Lira 200	Lira 200

ESCROW DATA		CURRENCY ASSIGN DATA			
Code	Denomination	Code	Country	Denomination	EXP
61h	Reserved	61h	00h	00h	00h
62h	Reserved	62h	00h	05h	00h
63h	Lira 5	63h	7Bh	05h	00h
64h	Lira 10	64h	7Bh	0Ah	00h
65h	Lira 20	65h	7Bh	14h	00h
66h	Lira 50	66h	7Bh	32h	00h
67h	Lira 100	67h	7Bh	64h	00h
68h	Lira 200	68h	7Bh	C8h	00h

XBA-TRY6 (Pulse/JPSTD/ccTalk/ICT/RS232 A0)

FUNCTION		SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Pulse Mode	Other Mode								
★ Inhibit Active HIGH	ccTalk CRC 16-bit checksum	ON							
Inhibit Active LOW	ccTalk 8-bit checksum & Restoe Mode.(Note.6)	OFF							
★ ENABLE INHIBIT-Sleep only			ON						
5 second Timeout only			OFF						
Normal (Note.2)				ON					
Mode 1 (Note.3)				OFF					
Mode 2 (Note.4)					ON				
★ Mode 1 + 2 (Note.5)					OFF				
★ Credit-Pulse Normal HIGH	ccTalk 16-bit Encryption mode & Restoe Mode.(Note.6)					ON			
Credit-Pulse Normal LOW	ccTalk 16-bit Decrypt mode & 8-bit checksum					OFF			
★ Pulse Mode							ON		
Other Mode							OFF		
★ 1 pulse / Lira 5	ccTalk Mode							OFF	OFF
5 pulse / Lira 5	RS232 A0 Mode							OFF	ON
10 pulse / Lira 5	ICT104U Mode							ON	OFF
25 pulse / Lira 5	JPSTD Mode							ON	ON

This dip switch is located on the CPU board, remove the CPU board cover first.

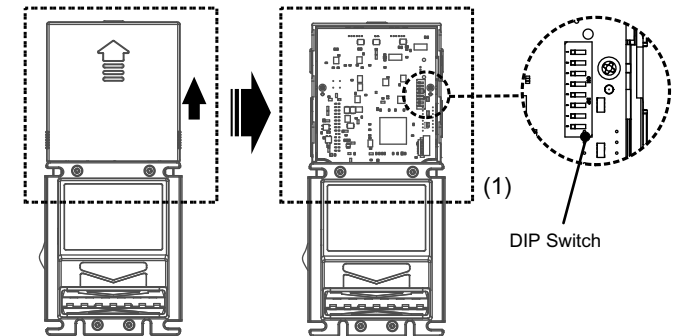

★ Manufacture setting

- Note :
1. After setting dip switch of the credit pulses, you should reset the bill acceptor again.
 2. Normal : No sleep function.
 3. Mode 1 : Bill-acceptor wakes up VMC with banknote only (special cable required).
 4. Mode 2 : VMC wakes up bill-acceptor.
 5. Mode 1+2 : Bill-acceptor wakes up with banknote or by VMC.
 6. Restore ccTalk address to its default value of 40 and the encryption key to its default value of 123456.