
XBA-THB4 Option Switch SettingsSupported bill THB 20, 50, 100, 500 4bills.

	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
	Reject THB 20	ON							
*	Accept THB 20	OFF							
	Reject THB 50		ON						
*	Accept THB 50		OFF						
	Reject THB 100			ON					
*	Accept THB 100			OFF					
	Reject THB 500				ON				
*	Accept THB 500				OFF				
	Reserved					ON			
*	Reserved					OFF			
	Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
*	Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
	Stack Banknote when Power-up							ON	
*	Reject Banknote when Power-up							OFF	
	ENABLE IrDA Download								ON
*	Reserved							OFF	

This dip switch is located at the side of XBA.



Currency Assign Data


Interface Bill value	ICT002U	ICT104U	ICT104V	Pulse	MDB	
BV1	THB 20					
BV2	THB 50					
BV3	THB 100					
BV4	THB 500					

_Appendix

XBA-THB4 (Pulse/MDB/ICT)

_									
	FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
	Inhibit Active HIGH	ON							
←	Inhibit Active LOW	OFF							
	ENABLE INHIBIT-Sleep only		ON						
~	5 second Timeout only		OFF						
	Normal (Note.2)			OFF	OFF				
	Mode 1 (Note.3)			OFF	ON				
	Mode 2 (Note.4)			ON	OFF				
₹	Mode 1 + 2 (Note.5)			ON	ON				
+	Credit-Pulse Normal HIGH			•		ON			
	Credit-Pulse Normal LOW					OFF			
+	Pulse Mode						ON		
	Other Mode						OFF		
	Pulse Mode	Other Mode							
₩	1 pulse / THB 10	MDB Mode					OFF	OFF	
	5 pulse / THB 10	ICT002U Mode						OFF	ON
	10 pulse / THB 10	ICT104U Mode						ON	OFF
	25 pulse / THB 10	ICT104V Mode					ON	ON	

This dip switch is located on the CPU board, remove the CPU board cover first.

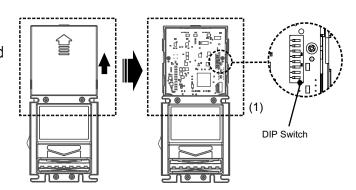

★ Manufacture setting

Note: 1.Affer setting dip switch of the credit pulses, you should reset the bill acceptor again.

2.Normal : No sleep function.

3.Mode 1 : Bill-acceptor wakes up VMC with banknote only (special cable required).

4.Mode 2 : VMC wakes up bill-acceptor.

5.Mode 1+2: Bill-acceptor wakes up with banknote or by VMC.

© 2013 International Currency Technologies Corporation Vol. 1.0 Part Number : SWT8TH410-R