


## XBA-TWD4 Option Switch Settings

Supported bill \$ 100, 200, 500, 1000 4bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject \$ 100	ON							
★ Accept \$ 100	OFF							
★ Reject \$ 200		ON						
★ Accept \$ 200		OFF						
★ Reject \$ 500			ON					
★ Accept \$ 500			OFF					
★ Reject \$ 1000				ON				
★ Accept \$ 1000				OFF				
★ Reserved					ON			
★ Reserved					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ ENABLE IrDA Download								ON
★ Reserved								OFF


This dip switch is located at the side of XBA.

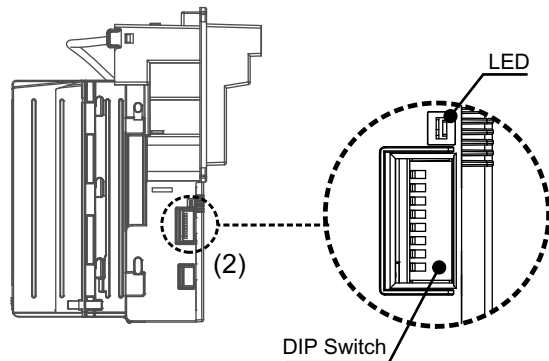

## XBA-TWD4 (Pulse/MDB/ICT)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Inhibit Active HIGH	ON							
★ Inhibit Active LOW	OFF							
★ ENABLE INHIBIT-Sleep only		ON						
★ 5 second Timeout only		OFF						
★ Normal (Note.2)			OFF	OFF				
★ Mode 1 (Note.3)			OFF	ON				
★ Mode 2 (Note.4)			ON	OFF				
★ Mode 1 + 2 (Note.5)			ON	ON				
★ Credit-Pulse Normal HIGH					ON			
★ Credit-Pulse Normal LOW					OFF			
★ Pulse Mode						ON		
★ Other Mode						OFF		
<b>Pulse Mode</b>	<b>Other Mode</b>							
★ 1 pulse / \$ 100	MDB Mode						OFF	OFF
★ 5 pulse / \$ 100	ICT002U Mode						OFF	ON
★ 10 pulse / \$ 100	ICT104U Mode						ON	OFF
★ 25 pulse / \$ 100	ICT104V Mode						ON	ON

This dip switch is located on the CPU board, remove the CPU board cover first.

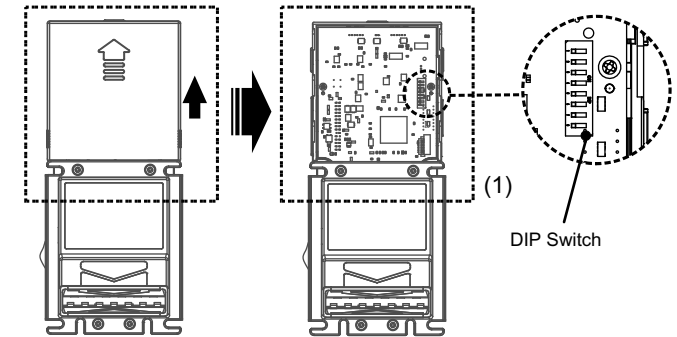

### ★ Manufacture setting

- Note :
1. After setting dip switch of the credit pulses, you should reset the bill acceptor again.
  2. Normal : No sleep function.
  3. Mode 1 : Bill-acceptor wakes up VMC with banknote only (special cable required).
  4. Mode 2 : VMC wakes up bill-acceptor.
  5. Mode 1+2 : Bill-acceptor wakes up with banknote or by VMC.
  6. BV1=\$ 100, BV2=\$ 200, BV3=\$ 500, BV4=\$ 1000.