


## XBA-CHF4 Option Switch Settings

Supported bill Fr 10, 20, 50, 100 4bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject Fr 10	ON							
★ Accept Fr 10	OFF							
★ Reject Fr 20		ON						
★ Accept Fr 20		OFF						
★ Reject Fr 50			ON					
★ Accept Fr 50			OFF					
★ Reject Fr 100				ON				
★ Accept Fr 100				OFF				
★ Reserved					ON			
★ Reserved					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ ENABLE IrDA Download								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

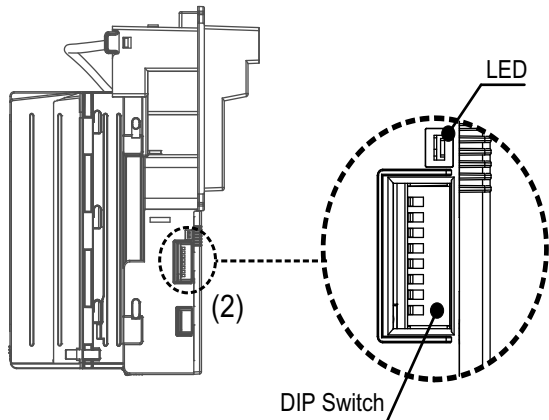


### Currency Assign Data

Interface Bill value	ICT002U	Parallel A3	ICT104V	Pulse	MDB
BV1	Fr 10	Fr 10	Fr 10	Fr 10	Fr 10
BV2	Fr 20	Fr 20	Fr 20	Fr 20	Fr 20
BV3	Fr 50	Fr 50	Fr 50	Fr 50	Fr 50
BV4	Fr 100	Fr 100	Fr 100	Fr 100	Fr 100

## XBA-CHF4 (Pulse/MDB/ICT/Parallel A3)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Inhibit Active HIGH	ON							
★ Inhibit Active LOW	OFF							
★ ENABLE INHIBIT-Sleep only		ON						
★ 5 second Timeout only		OFF						
★ Normal (Note.2)			OFF	OFF				
★ Mode 1 (Note.3)			OFF	ON				
★ Mode 2 (Note.4)			ON	OFF				
★ Mode 1 + 2 (Note.5)			ON	ON				
★ Credit-Pulse Normal HIGH					ON			
★ Credit-Pulse Normal LOW					OFF			
★ Pulse Mode						ON		
★ Other Mode						OFF		
<b>Pulse Mode</b>		<b>Other Mode</b>						
★ 1 pulse / Fr 10							MDB Mode	OFF OFF
★ 5 pulse / Fr 10							ICT002U Mode	OFF ON
★ 10 pulse / Fr 10							Parallel A3 Mode	ON OFF
★ 25 pulse / Fr 10							ICT104V Mode	ON ON

This dip switch is located on the CPU board, remove the CPU board cover first.

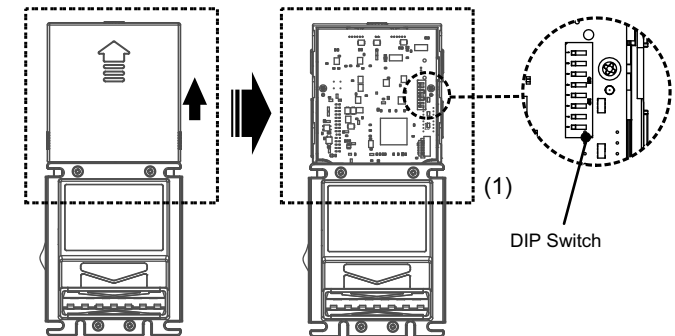

### ★ Manufacture setting

Note : 1. After setting dip switch of the credit pulses, you should reset the bill acceptor again.

2. Normal : No sleep function.
3. Mode 1 : Bill-acceptor wakes up VMC with banknote only (special cable required).
4. Mode 2 : VMC wakes up bill-acceptor.
5. Mode 1+2 : Bill-acceptor wakes up with banknote or by VMC.