


XBA-THB4 Option Switch Settings

Supported bill THB 20, 50, 100, 500 4bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject THB 20	ON							
★ Accept THB 20	OFF							
★ Reject THB 50		ON						
★ Accept THB 50		OFF						
★ Reject THB 100			ON					
★ Accept THB 100			OFF					
★ Reject THB 500				ON				
★ Accept THB 500				OFF				
★ Reserved					ON			
★ Reserved					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ ENABLE IrDA Download								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

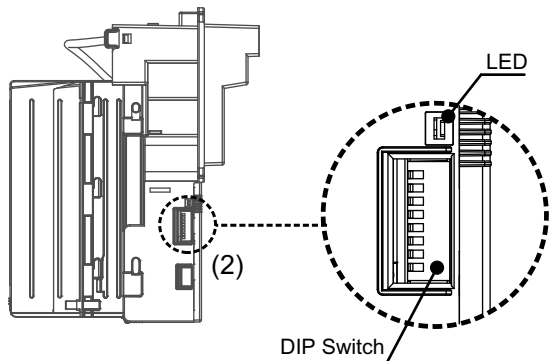


Currency Assign Data

Interface Bill value	ICT002U	Parallel A3	ICT104V	Pulse	MDB
BV1	THB 20	THB 20	THB 20	THB 20	THB 20
BV2	THB 50	THB 50	THB 50	THB 50	THB 50
BV3	THB 100	THB 100	THB 100	THB 100	THB 100
BV4	THB 500	THB 500		THB 500	THB 500

XBA-THB4 (Pulse/MDB/ICT/Parallel A3)

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Inhibit Active HIGH	ON							
★ Inhibit Active LOW	OFF							
★ ENABLE INHIBIT-Sleep only		ON						
★ 5 second Timeout only		OFF						
★ Normal (Note.2)			OFF	OFF				
★ Mode 1 (Note.3)			OFF	ON				
★ Mode 2 (Note.4)			ON	OFF				
★ Mode 1 + 2 (Note.5)			ON	ON				
★ Credit-Pulse Normal HIGH					ON			
★ Credit-Pulse Normal LOW					OFF			
★ Pulse Mode						ON		
★ Other Mode						OFF		
Pulse Mode						Other Mode		
★ 1 pulse / THB 10							MDB Mode	OFF OFF
★ 2 pulse / THB 10							ICT002U Mode	OFF ON
★ 4 pulse / THB 10							Parallel A3 Mode	ON OFF
★ 20 pulse / THB 10							ICT104V Mode	ON ON

This dip switch is located on the CPU board, remove the CPU board cover first.

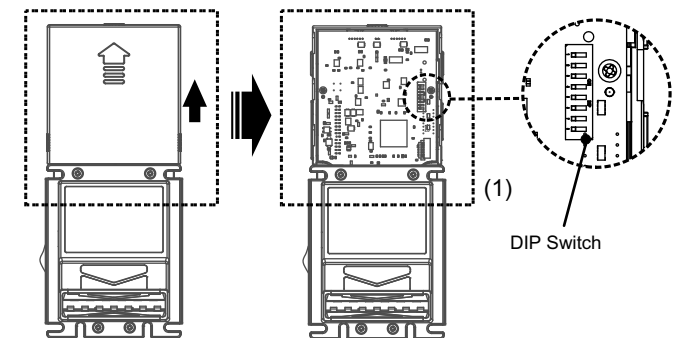

★ Manufacture setting

- Note :
1. After setting dip switch of the credit pulses, you should reset the bill acceptor again.
 2. Normal : No sleep function.
 3. Mode 1 : Bill-acceptor wakes up VMC with banknote only (special cable required).
 4. Mode 2 : VMC wakes up bill-acceptor.
 5. Mode 1+2 : Bill-acceptor wakes up with banknote or by VMC.